Rev:01
Date:20060

Keling Technology Inc
Hybrid Stepping Motor

COMMON RATINGS

Step angle:1.8°
Positional accuracy: +/-5%
Number of Phase: 2
Temperatuure rise: 80°C Max
Inertia: 68 gcm^2

Dielectric strength: 500VDC
Insulation resistance: 100MOhm(500VDC)
Radial play:
Insulating class: B
Weight: 0.35 kg

SPECIFICATIONS

Holding Torque (2 phases on) kg.cm ±10%	Rated Current/Phase (Amps DC)	Phase Reslstance (ohms) ±10%	Voltage Current/Phase (V DC)	Phase Inductance (mH) ±20% Typical (1kHz)
4.4	1.68	1.65	2.8	2.8

DIMENSIONS unit=mm

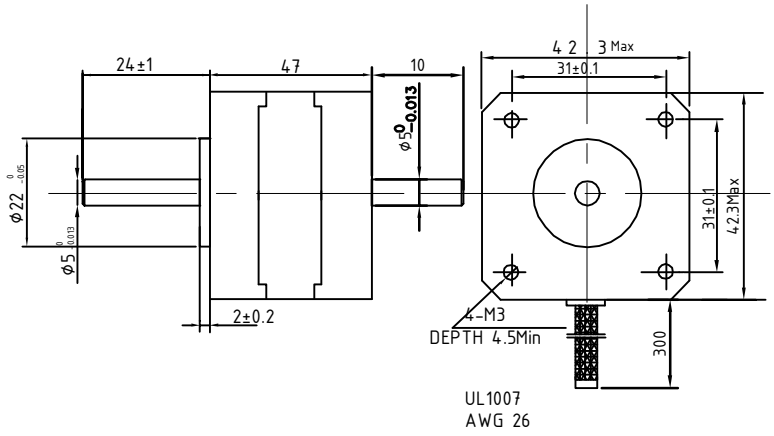

CONNECTIONS



KL17H1168-4B	
	Keling Technology,Inc